



LED EDGELIT PANEL EGG6626N4DO

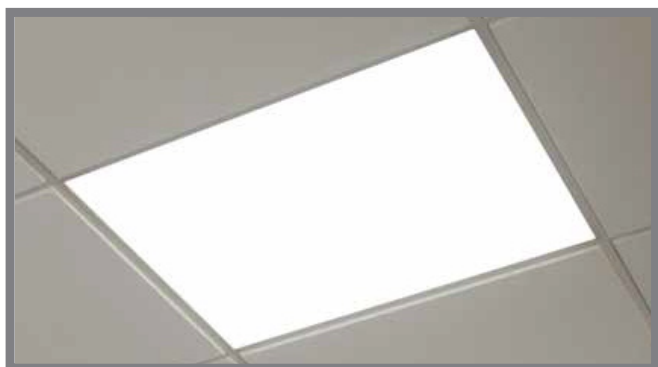

Premium LED panel, boasting even lower wattage, higher efficiency and UGR > 19

- Supplied with remote 'plug-and-play' driver, available in standard fixed output or dimmable. All compatible with emergency pack accessory.
- Quick and easy to install with no maintenance requirements.
- 4000K 'neutral white' colour temperature as standard; other colour temperatures available to order, subject to minimum requirement - 3000K / 5000K / 6000K.

120 lm/w

EMERGENCY & DIMMABLE OPTIONS

4000K NEUTRAL WHITE

3 or 6 YEAR WARRANTY



Wattage (w)	26
Lumens (lm)	3120
Luminaire Efficacy	120
Colour Temp (K)	4,000
CRI	>80
Dimensions(mm)	595l*595w*12h
LifeSpan (hrs)	50,000
UK Warranty (years)	3 std. / 6 ext.
Dimmable Option	✓
Emergency Option	✓

Components



STANDARDS	
EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)

CE RoHS

